
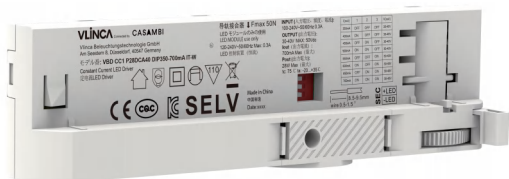


In-track Series LED Driver



Product description

- Can be integrated in Casambi systems (Casambi Ready)
- Dimmable intrack constant current LED driver
- Selectable fixed output current between 350-700mA via DIP switch
- For luminaires of protection class II
- Forms automatically a wireless communication network with up to 250 nodes
- Max. output power 28 W
- Terminal blocks: 45° push terminals

Advantage

- Compact dimension, wide current range
- Up to 87.5% efficiency
- Typ. power consumption on stand-by < 0.5 W
- Dimming range 1 to 100 %
- Life-time up to 50,000 hours
- 5-year guarantee

Housing properties


- Casing: polycarbonate, white(RAL9016)/black(RAL9005) Grey(RAL7040)
- Type of protection IP20

Features

- Overtemperature protection
- Overload protection
- Short-circuit protection
- No-load protection
- Burst protection voltage 1 kV
- Surge protection voltage 1 kV (L to N)

Typical applications

- For spot light and downlight in retail, residential and hospitality application

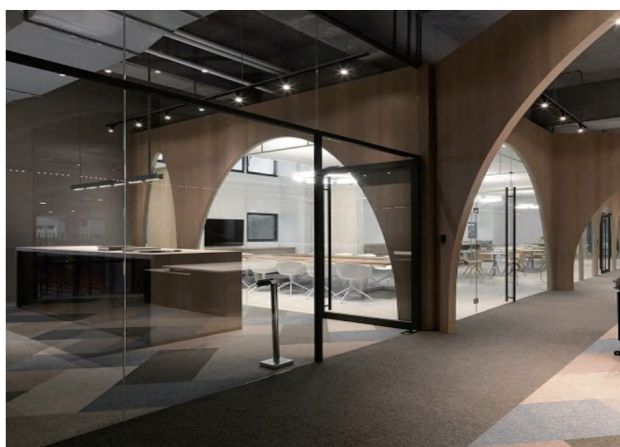

Specific Technical Data



Type	Input Voltage	Output Power	Output Voltage	Output Current	Ripple	Tc	Ta	Dimension
VBD CC1 P28DCA40 DIP350-700mA IT	120-240Vac	Max.28W	14-40V	350-700 mA	<5%	75°C	-20...+35°C	166*31.4*43mm

Ordering Data

Article number	Description	Dimension of product	Net Wt/pc	Package/ctn	Dimension of carton
1060800564	VBD CC1 P28DCA40 DIP350-700mA IT-W	166*31.4*43mm	116g	50pcs	400*325*290mm
1060800565	VBD CC1 P28DCA40 DIP350-700mA IT-B	166*31.4*43mm	116g	50pcs	400*325*290mm
1060800640	VBD CC1 P28DCA40 DIP350-700mA IT-G	166*31.4*43mm	116g	50pcs	400*325*290mm

Tc position

Unit:mm

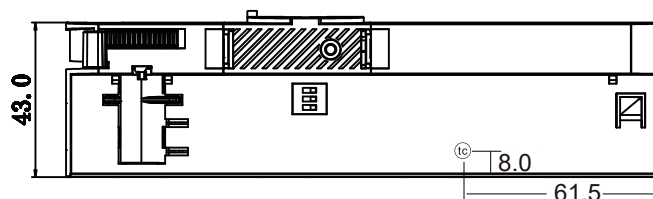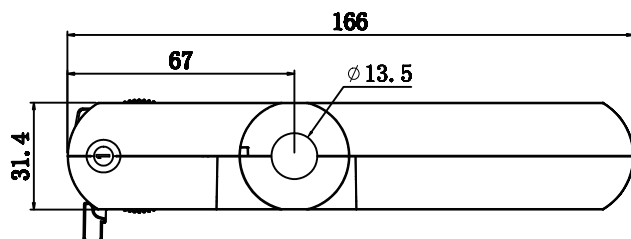

Technical data

Product type	28W	
Rated supply voltage=U-IN on label	120-240	V
Input voltage range, AC, performance/safety	108-264	V
Mains frequency, performance/safety	50-60	Hz
Overvoltage protection(Input side)	320Vac,1h	
Max input current (@120-240, 50/60Hz)=I-IN on label	0.3	A
Max input power (@120-240, 50/60Hz)=I-IN on label	33	W
Typ.power consumption(at 120, 230V, full load)	31.5	W
Max output power(@120-240,50/60Hz)=P-OUT on label	28	W
Max output voltage(V) (no load)=U-OUT from label	50	V
Output current tolerance(+/-%), (at 230/120V、 50/60Hz, full load)	±5	%
Output current tolerance(+/-%), (at 230/120V, 50/60Hz, min load)	±5	%
Output LF Current Ripple(<120Hz)	<5	%
Output P_ST_LM (in entire operating range)	<1	
Output SVM (in entire operating range)	<0.4	
Max output peak current (at 230/120V, 50/60Hz, full load)	771	mA
Leakage current (120/230Vac, 50/60Hz Input, Output full load)	<450	μA
THD(at 230/120V, 50/60Hz, full load)	<20	%
Power factor(at 230/120V, 50/60Hz, full load)	0.65C-0.99	
Efficiency(at 230V, 50Hz, full load)	87.5	%
Starting time (at 230/120V, 50/60Hz, any load)	<0.7	S
Turn off time (at 230/120V, 50/60Hz, full load)	<0.5	S
Hold-up time at power failure(output)	20	mS
Ambient temperature ta(℃)	-20...+35	℃
Ambient temperature ta(50000 Hrs)	35	℃
Max. casing temerature tc	75	℃
Storage temperature ts	-20...+80	℃

Adjust current

Output current can be adjusted by the DIP switch.



Set the current by DIP switch after mains off.
Use of DIP switch only after mains off.

DIP switch



VBD CC1 P28DCA40 DIP350-700mA IT	DIP Switch									ON OFF
	Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	
	Output Voltage	14-40V	14-40V	14-40V	14-40V	14-40V	14-40V	14-40V	14-40V	
	Output Power	4.2-14W	5.6-16W	6.3-18W	7.0-20W	7.7-22W	8.4-24W	9.1-26W	9.8-28W	


1. Standards

EN 62479, EN 50663
EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547
EN 61347-1, EN 61347-2-13, EN 62493
EN 62384, EN 61643-11
ETSI EN 301 489-1
ETSI EN 301 489-17
ETSI EN 300 328

2. Installation and wiring


2.1 Circuit diagram

120V-240V
50/60Hz

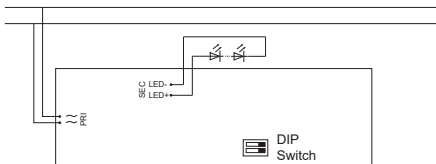

2.2 Wiring type and cross section

The wiring can be in stranded wires with ferrules or solid with a cross section of 0.5-1.5mm² Strip 8.5-9.5mm of insulation from the cables to ensure perfect operation of the push-wire terminals.



Wiring guidelines

All connections must be kept as short as possible to ensure good EMI behaviour.

Mains leads should be kept apart from LED Driver and other leads (ideally 5-10cm distance)


The secondary wires (LED module) should be routed in parallel to ensure good EMC performance.

Incorrect wiring can damage LED modules.

To avoid the damage of the Driver, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).

2.4 Release of the wiring

Press down the "push button" and remove the cable from front.



2.5 Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 10 seconds
4. Connect LED module again

2.6 Mounting luminaire

Max. allowed weight of complete luminaire: 5 kg (50 N)

This is valid for horizontal mounting of track system only.

2.7 Compatible tracks

Manufacturer	Type	system	Casing colour
Powergear	PRO-0410/1520/30	3 Phase	White, Black, Grey
Powergear	PRO-R0410/15/20/30	3 Phase	White, Black, Grey
A.A.G. Stucchi	ONETRACK	3 Phase	White, Black, Grey
NORDIC ALUMINIUM	GLOBAL Trac Pro XTS 4xxx	3 Phase	White, Black, Grey
NORDIC ALUMINIUM	GLOBAL Trac Pro XTFS 4xxx	3 Phase	White, Black, Grey




Possible changes made by different manufactures that could affect the compatibility between tracks and adapters.

2.8 Adapter mounting into track


Insert the adapter into the track, so that the mechanical key (A) in the adaptor matches the groove (B) in the track. Rotate of about 90° the lever of the cam (C) until it reaches the locking position.

To open rotate the lever the opposite direction.

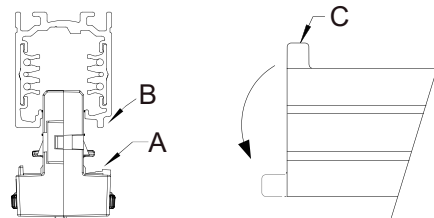

2.9 Phase selection

When the track is connected to a three-phase system it is possible to select the phase (1, 2 or 3) to distribute the single luminaires in the system, by means of the proper selector (A) of the adaptor.



3. Thermal details and life-time

Expected life-time

Type	ta	35°C	45°C
	tc	75°C	85°C
VBD CC1P28DCA40			
DIP350-700mA IT	Life-time	>50000h	>30000h

Test result at max. output voltage.

The LED drivers are designed for a life-time based on left reference conditions and with a failure probability of less than 10%.
Life-time declarations are informative and represent no warranty claim.

4. Maximum loading of automatic circuit breakers in relation to inrush current

Maximum loading of automatic circuit breakers

									Inrush current	
Automatic circuit	C10	C13	C16	C20	B10	B13	B16	B20	I _{max}	Time
InstallationØ	1.5mm ²	1.5mm ²	2.5mm ²	4.0mm ²	1.5mm ²	1.5mm ²	2.5mm ²	4.0mm ²		
VBD CC1P28DCA40	23	30	37	46	23	30	37	46	18.3A	69.6µs
DIP350-700mA IT										

These are Max.values calculated out of inrush current! Please consider not to exceed the maximum rated continuous current of the circuit breaker, Calculation used typical values from ABB series S200 as a reference.

Actual values may differ due to used circuit breaker types and installation environment.

4.1 Harmonic distortion in the mains supply (at 100,230V/60,50Hz and full load) in %

Type	THD	3	5	7	9	11
VBD CC1P28DCA40	<10%	<12%	<10%	<7%	<5%	<3%
DIP350-700mA IT						

Acc.to EN61000-3-2. Harmonics<5 mA or <0.6% (whatever is greater) of the input current are not considered for calculation of THD

5. Functions

5.1 Short-circuit behaviour

In case of a short circuit on the secondary side (LED) the LED Driver switches off. After elimination of the short circuit the nominal operation is restored automaticall.

5.2 No-load operation

The LED Driver works in burst working mode to provide a constant output voltage regulation which allows the applicaation to be able to work safety when LED string opens due to a failure.

5.3 Overload protection

If the output voltage range is exceeded the LED Driver will protect itself by reducing the LED output current.
After elimination of the overload, the nominal operation is restored autumatically.

6.For LED module use only.

7.Installation shall be done by qualified technician.

8.Do not dispose of electrical appliances as unsorted municipal waste,use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain,damaging your health and well-being.



9. Miscellaneous

9.1 Insulation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.
According to IEC 60598-A Annex Q (informative only!), each luminaire should be submitted to an insulation test with 500V DC for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The insulation resistance must be at least 2MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500V AC(or 1.414x1500V DC).

To avoid damage to the electronic devices this test must not be conducted.

9.2 Conditions of use and storage

Humidity: 5% up to max.85%,
not condensed
(40 days/year at 85%)

Storage temperature:-20 °C up to max.+80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.


9.3 Maximum number of switching cycles

All LED Driver are tested with 50,000 switching cycles.


The actual achieved number of switching cycles is significantly higher.

10. Electrical values (@230VAC 50HZ)


10.1 Operating window

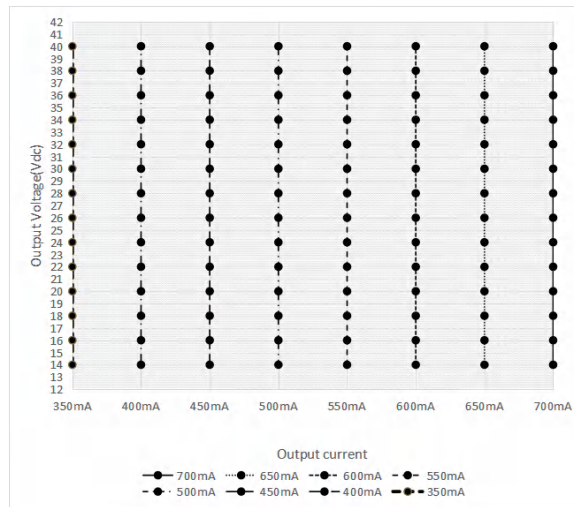


10.2 Efficiency vs load (@230VAC 50HZ)

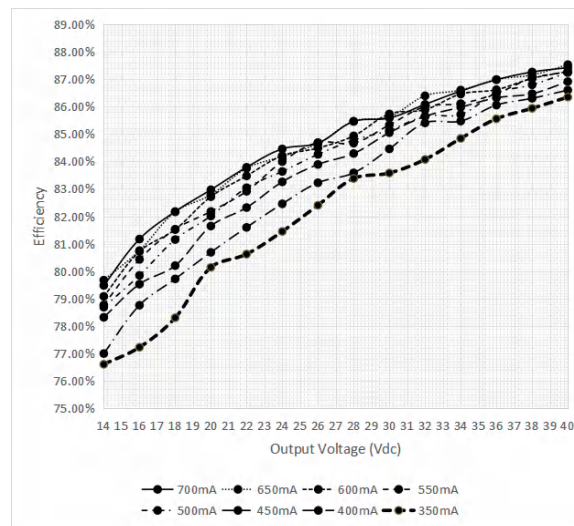


10.3 THD vs load (@230VAC 50HZ)

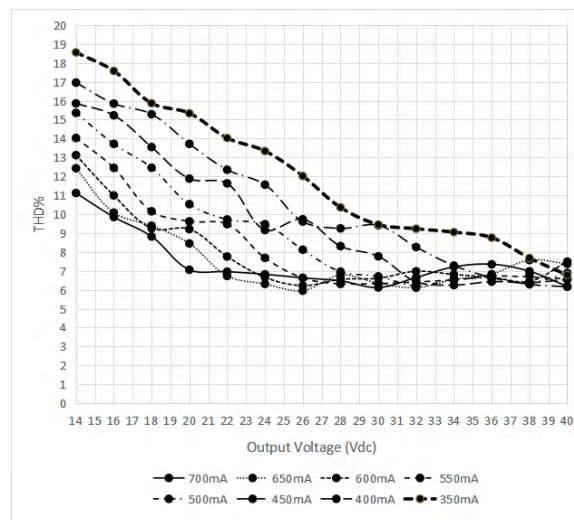


10.4 Power factor vs load (@230VAC 50HZ)

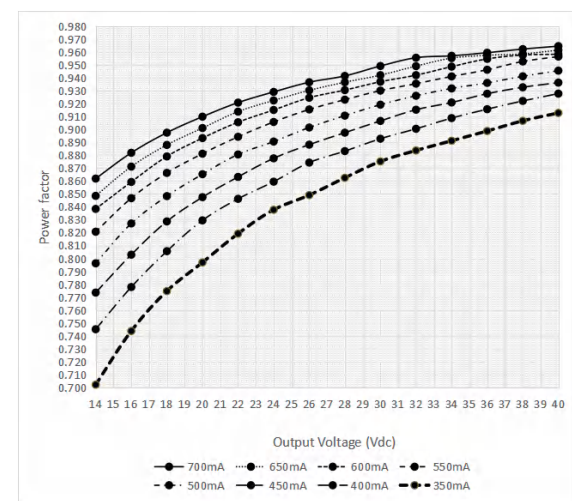

10.5 Input power vs load (@230VAC 50HZ)

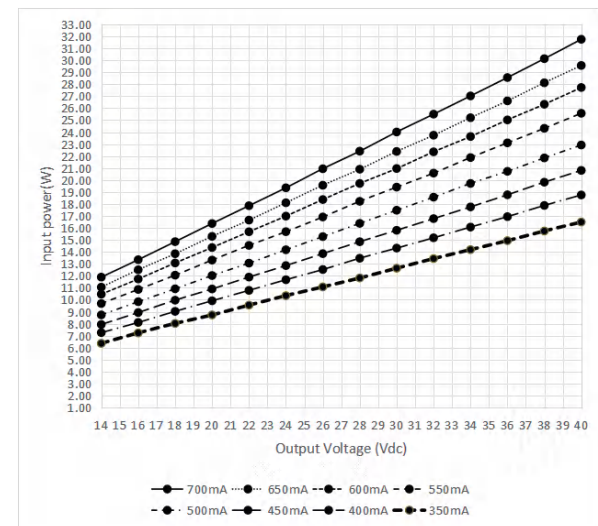


10.6 Input current vs load (@230VAC 50HZ)

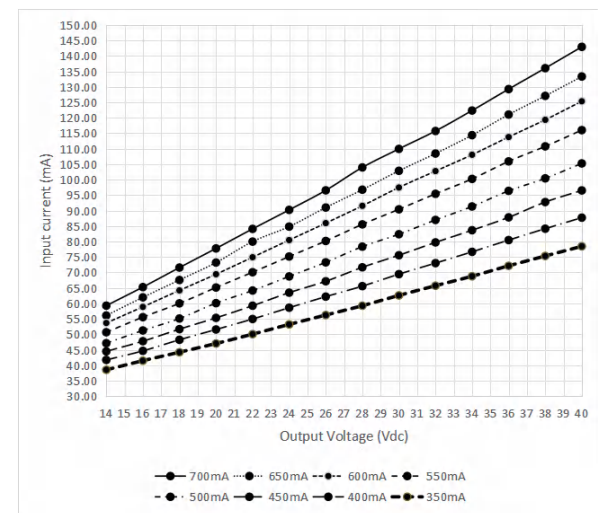


10. Electrical values (@120VAC 60HZ)


10.1 Operating window

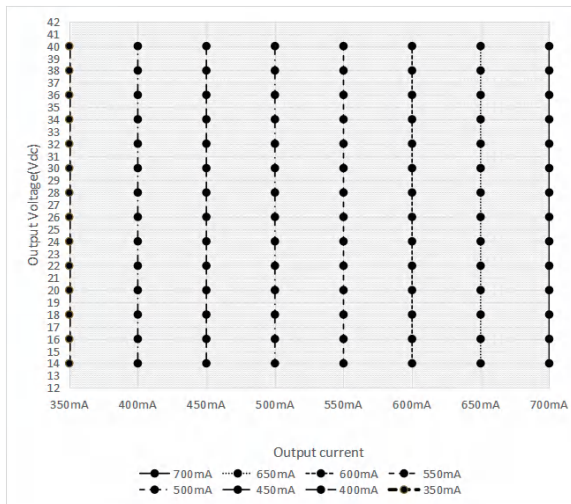


10.2 Efficiency vs load (@120VAC 60HZ)

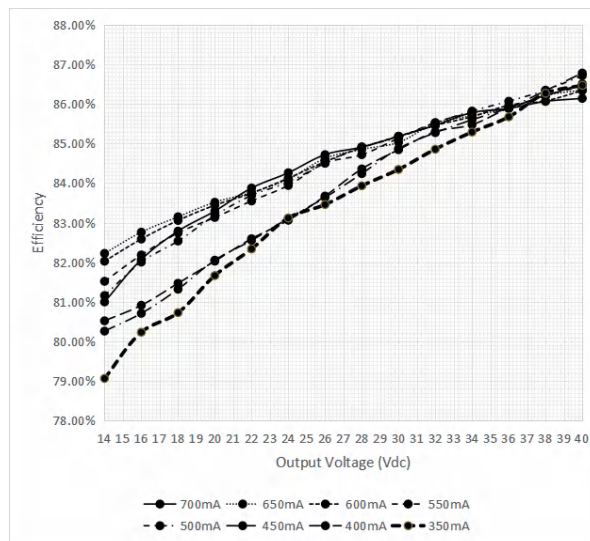


10.3 THD vs load (@120VAC 60HZ)

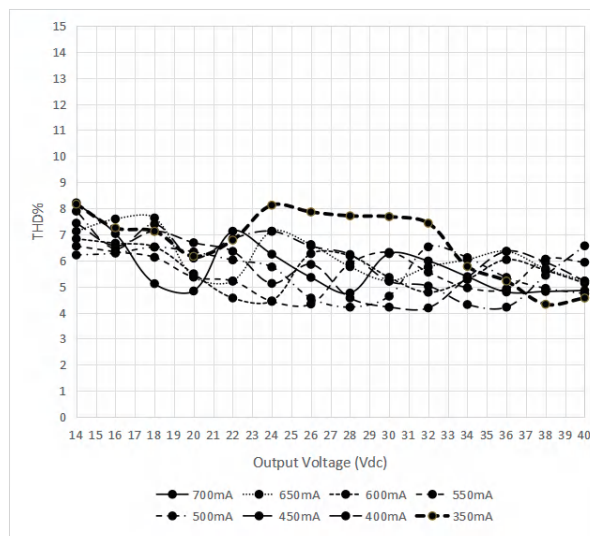


10.4 Power factor vs load (@120VAC 60HZ)

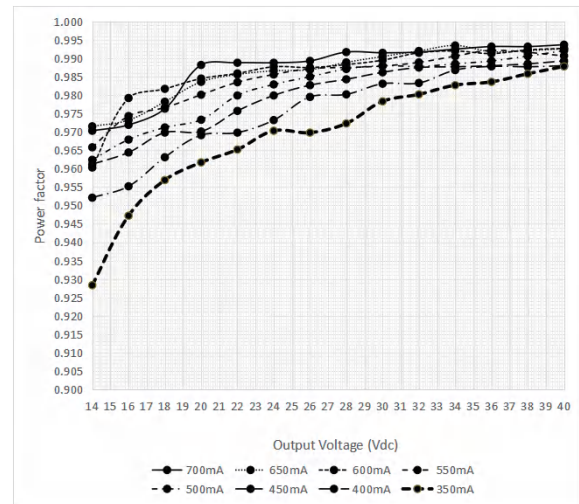

10.5 Input power vs load (@120VAC 60HZ)

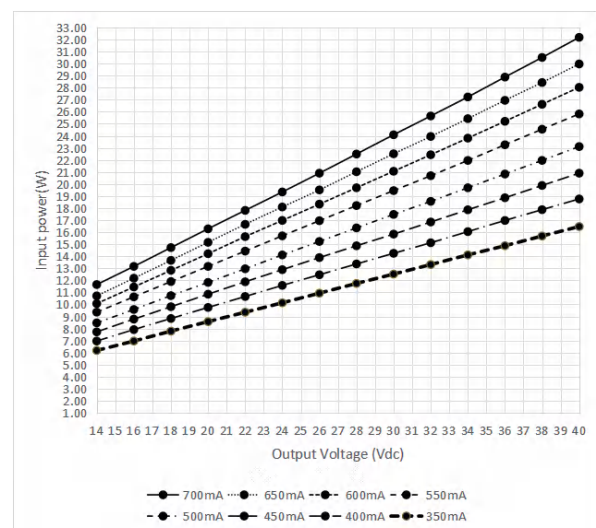


10.6 Input current vs load (@120VAC 60HZ)

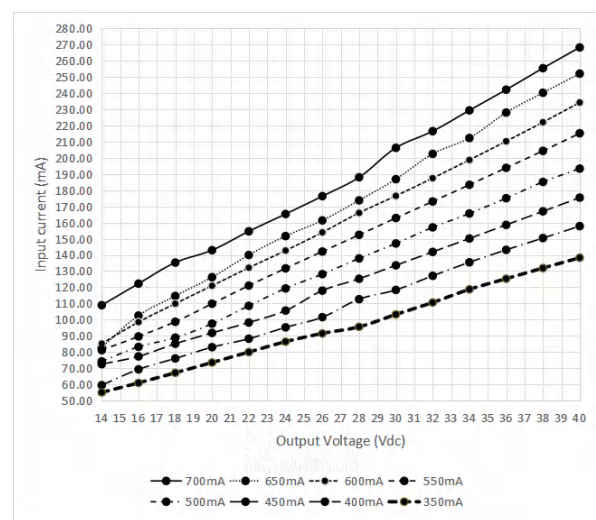

Accessory NIPPLE


Product description

- Optional threaded sleeve for luminaire mounting
- Suitable for S-9009/D-M10 threaded nut

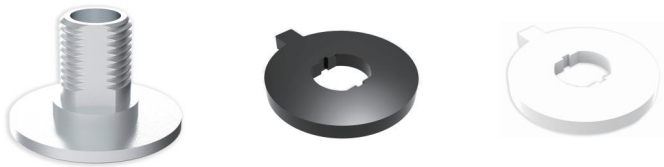

Ordering data

Article number	Description	Net Wt/pc	Package/c tn
301000328	NIPPLE M10*1.0,Length 9.2mm aluminium anodize	3.0g	50pcs
499000196	STOP SPACER PC BLACK	1.0g	50pcs
499000195	STOP SPACER PC WHITE	1.0g	50pcs



Version Record

Version	Remark	Issued Date
V1.0	Initial issued	2025-06-30
V2.0	Added the grey model	2026-05-15